




XE10E

CRAWLER EXCAVATOR



SOLID TO SUCCEED



Operating weight 1200kg

Bucket capacity 0.022m³

Rated power 9.8kW

XCMG European Sales and Services GmbH

Europark Fichtenhain B4, 47807 Krefeld, Germany
Email : info@xcmg-ess.de



WWW.XCMGGLOBAL.COM
XCMG OFFICIAL WEBSITE

XCMG
SOLID TO SUCCEED

SOLID TO SUCCEED



Applications : Repair of houses and courtyards, Landscape renovation.

Features : High power engine, powerful. Compact short tail design, suitable for narrow spaces. Equipped with efficient hydraulic oil dispersion, instruments, and a deflectable armrest box, it provides good human-machine comfort. Support multifunctional attachments, capable of handling multiple tasks.

A yellow JCB XE10E mini excavator is shown from a side profile, facing left. It has a black bucket and a black blade. The excavator is positioned on a dark, rocky, and uneven terrain. The background is a cloudy sky. The JCB logo is visible on the arm, and the model number 'XE10E' is on the side of the body.

Features : High power engine, powerful. Compact short tail design, suitable for narrow spaces. Equipped with efficient hydraulic oil dispersion, instruments, and a deflectable armrest box, it provides good human-machine comfort. Support multifunctional attachments, capable of handling multiple tasks.

  kg Dozer Blade up																
In travel direction					Against travel direction					Right angle to travel direction						
LD	X Y	1.0m			1.5m			2.0m			2.5m			MAX		
																m
0.88m	Z2							*183		*183				201	*210	2.29
	Z1				*319		*319	*184		*184	166		182	143	158	2.82
	Z3	*477		*477	*260		*260	*178		*178	164		*180	146	161	2.74

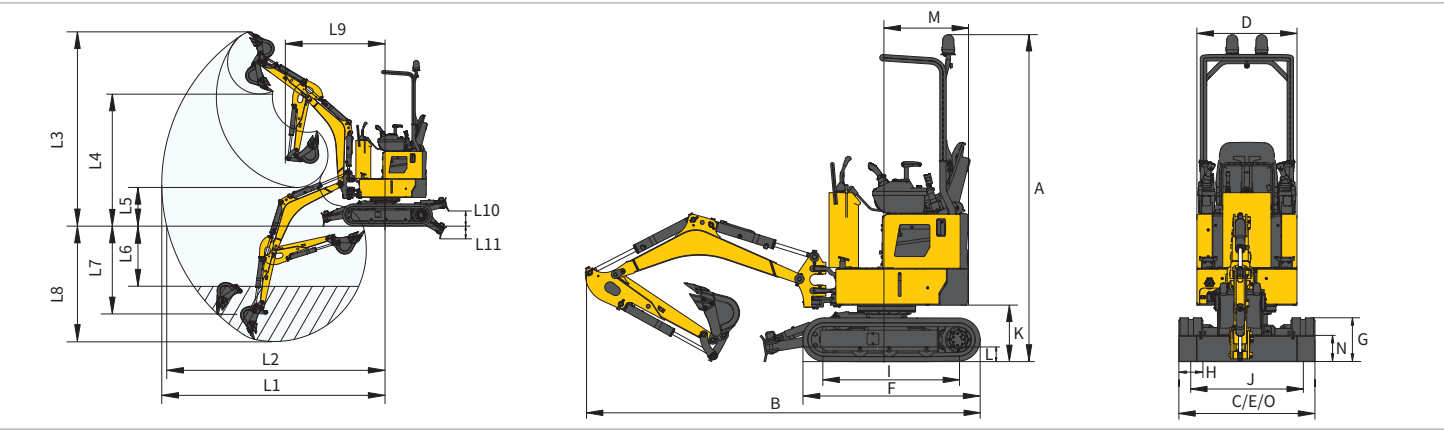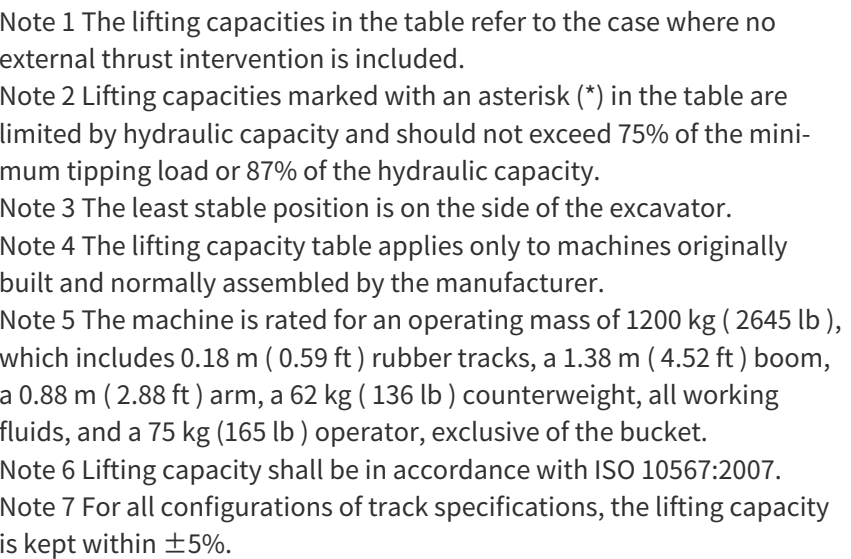

Item contents	Unit	Parameters
Operating weight	kg	1200
Engine		
Engine brand/model	-	Kubota/D782
Rated power/rpm	kW/rpm	9.8/2300
4-stroke	-	√
Water-cooled	-	√
Stroke	mm	73.6
Cylinder bore	mm	67
Number of cylinders	-	3
Maximum torque/rpm	N·m/rpm	44.5/1800
Displacement	L	0.778

Track		
Standard track shoe width	mm	180
Number of track shoes (per side)	-	40
Number of track roller (per side)	-	3
Number of track carrier roller (per side)	-	1

Item contents	Unit	Parameters
Hydraulic system		
Main pump	-	One variable pump
Maximum flow rate of main system	L/min	41.4
Main system pressure	MPa	22.8
Pilot system pressure	MPa	3.7
Travel system pressure	MPa	22.8
Swing system pressure	MPa	13.7

Standard		
Length of boom	mm	1380
Length of arm	mm	880
Bucket capacity	m ³	0.022 (Earthmoving bucket)

Optional		
Length of boom	mm	-
Length of arm	mm	-
Bucket capacity	m ³	0.05 (Ditch-clearing bucket)