



SOLID TO SUCCEED



WWW.XCMGGLOBAL.COM
XCMG OFFICIAL WEBSITE

XCMG European Sales and Services GmbH

Europark Fichtenhain B4, 47807 Krefeld, Germany

Email : info@xcmg-ess.de

XCMG

XE27CREV

PURE ELECTRIC HYDRAULIC EXCAVATOR



Operating weight 2780kg

Bucket capacity 0.08m³

Rated power 16.1kW

XCMG
SOLID TO SUCCEED

SOLID TO SUCCEED


Applications : Interior decoration, municipal construction and agricultural land.

Features : Tail-less design with “Unique Idyllic Green” painting, highlight the novelty and ecofriendly philosophy.



Never attempt to lift or hold any load in excess ofthe rated lifting capacity at the specifiedlifting radius and height. The lifting point is located on the lifting eye ofthe arm(Bucketweight is not included), any additional attachment such as bucket should be deducted fromthe lifting weight. When determining the net lifting weight allowed for the machine, theweight ofthe slings and any auxiliary lifting.devices must be deducted from the rated liftingcapacity. Lifting capacity is based on the machine standing on firm and level ground. Theoperator should consider working conditions such as soft oruneven ground. Beforeoperating the machine, the operator should familiarize himself with the safety procedures inthe relevant manual.

kg Dozer Blade up													
In travel direction Against travel direction Right angle to travel direction													
LD	Y	1.0m		2.0m		3.0m		4.0m		MAX			m
1.30m	Z2					*435	360			402	290		3.37
	Z1			791	525	430	298			282	198		4.10
	Z3	*990	*990	*596	527	425	294	294	207	350	244		3.47

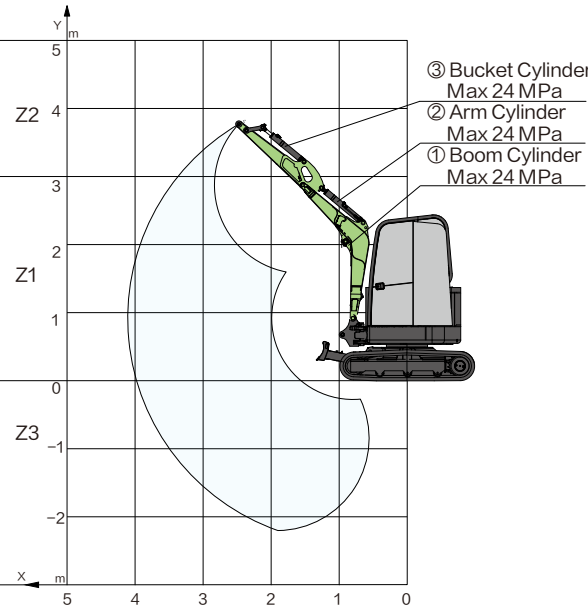

Note 1 The lifting capacities in the table refer to the case where no external thrust intervention is included.

Note 2 Lifting capacities marked with an asterisk (*) in the table are limited by hydraulic capacity and should not exceed 75% of the minimum tipping load or 87% of the hydraulic capacity.


Note 3 The least stable position is on the side of the excavator.

Note 4 The lifting capacity table applies only to machines originally built and normally assembled by the manufacturer.

Note 5 The machine is rated for an Operating mass of 2780 kg (6128 lb), which includes 0.3 m (0.98 ft) rubber tracks, a 2.09 m (6.86 ft) boom, a 1.3 m (4.27 ft) arm, a 164 kg (362 lb) counter–weight, all working fluids, and a 75 kg (165 lb) operator, exclusive of the bucket.

Note 6 Lifting capacity shall be in accordance with ISO 10567:2007.

Note 7 For all configurations of track specifications, the lifting capacity is kept within ± 5%.

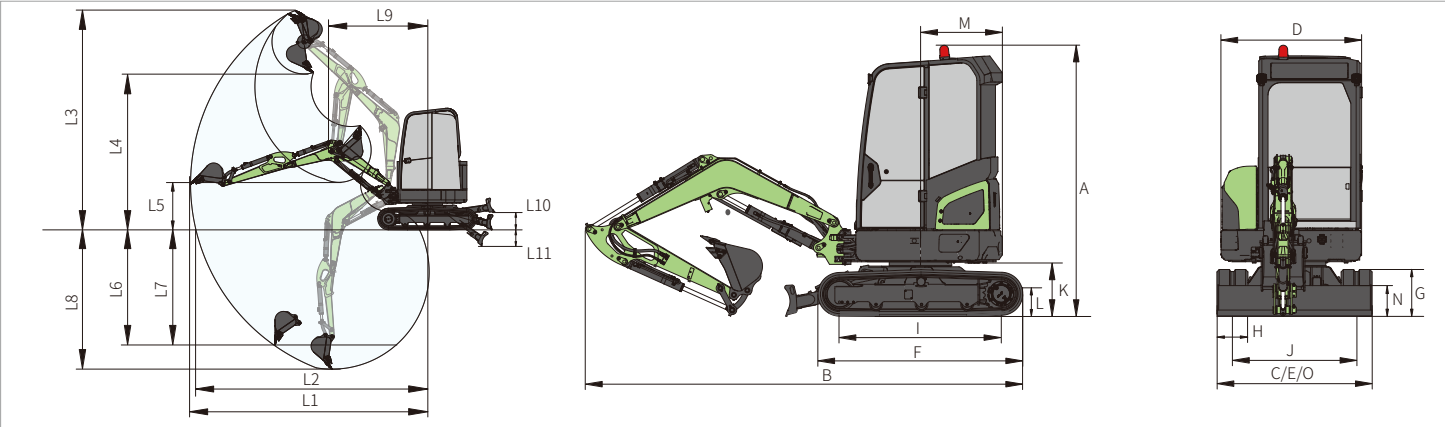

Item contents	Unit	Parameters
Working range		
L1	Maximum digging reach	mm 4750
L2	Maximum digging reach at GRP	mm 4640
L3	Maximum digging height	mm 4390
L4	Maximum unloading height	mm 3120
L5	Minimum unloading height	mm 955
L6	8 ft. level floor digging depth	mm 2312
L7	Maximum vertical digging depth	mm 2310
L8	Maximum digging depth	mm 2800
L9	Minimum swing radius	mm 1980
L10	Maximum lifting height of dozer blade	mm 310
L11	Maximum cutting depth of dozer blade	mm 330
Boom deflection angle (left)		- 72°
Boom deflection angle (right)		- 55°

Item contents	Unit	Parameters
Dimensions		
A	Overall height	mm 2620
B	Overall length	mm 4225
C	Overall width	mm 1500
D	Upper structure width	mm 1350
E	Chassis width	mm 1500
F	Track length	mm 1980
G	Track height	mm 455
H	Standard track shoe width	mm 300
I	Track wheelbase	mm 1560
J	Track gauge	mm 1200
K	Counterweight ground clearance	mm 528
L	Minimum ground clearance	mm 290
M	Tail Swing Radius	mm 790
N	Dozer blade height	mm 300
O	Dozer blade width	mm 1500

Item contents	Unit	Parameters
Operating weight	kg	2780
Electric motor		
Electric motor type	-	Permanent magnet synchronous motor
Rated power	kW	16.1
Maximum torque	N·m	150
Insulation class	-	H
Cooling method	-	Natural cooling

Battery pack		
Battery type	-	Lithium Iron Phosphate
Battery voltage	V	51.2
Battery capacity	kWh	33
Standard charging time	h	10
Fast charging time	h	3
Indicative runtime	h	4-6
Heating method	-	Heating film
Cooling method	-	Natural cooling

Track		
Standard track shoe width	mm	300
Number of track roller (per side)	-	3
Number of track carrier roller (per side)	-	1

Cab standard		
ISO 10262 : 1998 (OPG)	-	√
ISO 12117-2 : 2008 (ROPS)	-	√

Oil capacity		
Hydraulic oil tank capacity	L	20

Item contents	Unit	Parameters
Hydraulic system		
Main pump	-	1 x Variable pump
Maximum flow rate of main system	L/min	86.4
Main system pressure	MPa	24.3
Pilot system pressure	MPa	3.5
Travel system pressure	MPa	24.3
Swing system pressure	MPa	21

Main performance		
Travel speed (high/low)	km/h	4.0/2.1
Swing speed	r/min	10
Gradeability	-	30° (58%)
Ground specific pressure	kPa	26.4
Bucket digging force (ISO)	kN	23
Arm digging force (ISO)	kN	14
Maximum traction force	kN	29.7

Standard		
Length of boom	mm	2090
Length of arm	mm	1300
Bucket capacity	m³	0.08 (Earthmoving bucket)

Optional		
Length of boom	mm	-
Length of arm	mm	-
Bucket capacity	m³	0.026 (Earthmoving bucket) 0.13 (Ditch cleaning bucket)